



EAN code  
SHT-4: 8595188144759

Technical parameters		SHT-4
Power supply terminals:	A1 - A2	
Supply voltage:	AC 230 V / 50 - 60 Hz	
Input power:	AC max. 14 VA / 2 W	
Supply voltage tolerance:	-15 %; +10 %	
Real time back-up:	yes	
Transition to summer /winter time:	automatic	
Output		
Number of contacts:	2x changeover / SPDT (AgSnO <sub>2</sub> )	
Rated current:	16 A / AC1	
Switching power:	4000 VA / AC1, 384 W / DC	
Peak current:	30 A / < 3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Mechanical service life:	> 3x10 <sup>7</sup>	
Electrical service life (AC1):	> 0.7x10 <sup>5</sup>	
Timing circuit		
Real time reserve:	up to 3 years	
Accuracy of operation:	max. ±1 s per day, at 23°C (73 °F)	
Minimum triggering interval:	1 minute	
Program data storage period:	10 years at minimum	
Programming circuit		
Number of memory locations:	100	
Program:	daily, yearly (until 2099)	
Data display:	LCD display, backlight	
Other information		
Operating temperature:	-20.. +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30.. +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (power supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP10 terminals, IP40 from front panel	
Overtoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm <sup>2</sup> ):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)	
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")	
Weight:	126 g (4.45 oz.) - without battery	
Standards:	EN 61812-1, EN 61010-1	


Plug-in module




Type of backup battery: CR 2032 (3V)

- used for controlling the lighting (billboards, advertisements, shop windows, etc.) with no light sensor required.
- function:
  - by entering the geographic coordinates, the lighting can be switched on/off by sunrise and sunset
  - the preset coordinates for European cities, with optional manual adjustment of the geographical coordinates
  - during programming, 120 minutes may be added to the time of sunrise and sunset
  - selection of ON/OFF functions at sunrise or sunset
  - astro-clock with adjustable interruption
  - operating hours counter for each channel
  - timer - switching on the basis of real-time.
- two-channel design, where each channel is programmable independently of the other.
- automatic switching between winter and summer time.
- sealable transparent cover on the front panel.
- data and time backup using the battery.
- battery life - up to 3 years.
- easy replacement of the backup battery through the plug-in module, no disassembling is required.
- supply voltage: AC 230 V.
- 2-MODULE, DIN rail mounting.


Description

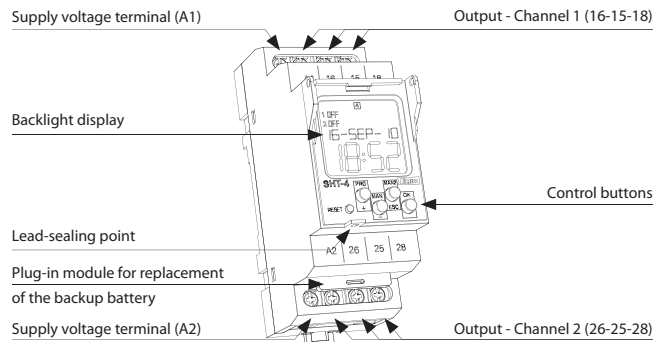

Description of items displayed on the screen

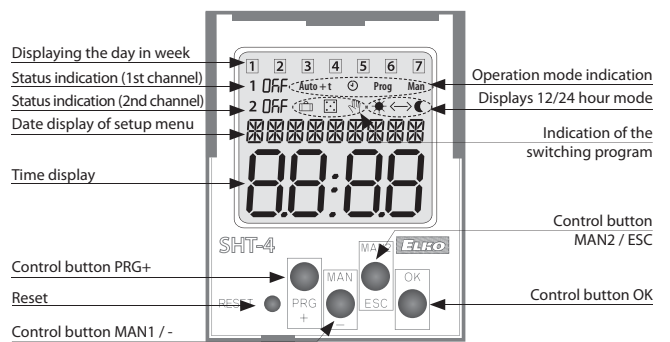

Wiring



Symbol

