
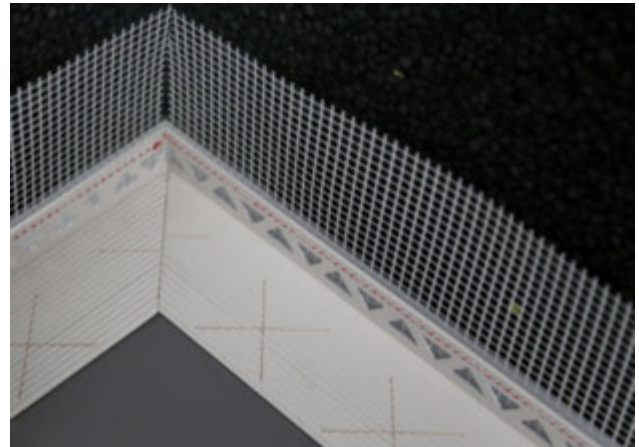


Product data sheet

Status: 21.09.2023 | 16:00

Item no. 37503

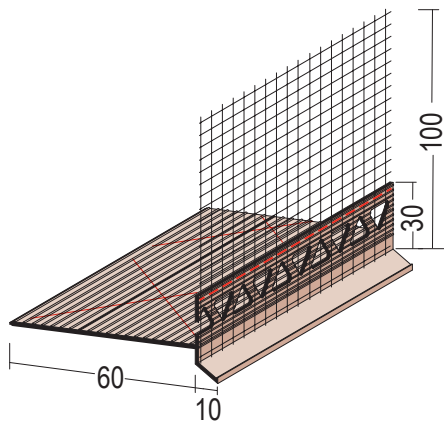

Designation	Insertion profile with drip nose for thermal insulation 60 mm/10 mm
Description	PVC insertion base profile, for 10 mm plaster thickness, with drip edge. Plastering leg with sewn-on alkali-resistant glass fiber fabric strip.
Product area	Thermal insulation
Product category	Connection and end profiles Base profiles
Plaster thickness	10,0 mm
Material	Rigid PVC with glass fibre mesh
Product length	200,0 cm
Leg length	60/40 mm
Meshsize	4 x 4 mm
Basis weight	160 g/m ²
Productcolor	10, white
Application Areas	For inserting between façade and perimeter insulation also in the lintel area of insulated roller shutter and Venetian blind boxes.
Treatment	The insertion leg with smooth bottom view can be shortened by a predetermined breaking point of 60 mm to 40 mm. This also applies to roller shutters and Venetian blind boxes with 40 mm insulation thickness.
Packaging Unit	10 STB / 25 KAR
Annotation	One-sided tissue protrusion of 10 cm at the end of the bead.

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

PROTEKTORWERK
Florenz Maisch GmbH & Co. KG
Postfach 1420, D-76554 Gaggenau
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977 - 0
Fax +49 7225 9 77 - 111
info@protektor.com
www.protektor.com

