

	ALBAU SIA
	Technical data sheet

CORNER PROFILE WITH PVC EDGE

Corner reinforcement profile made of galvanised steel with rounded PVC edge - cover strip for interior and exterior plaster of 10 mm and thicker. The PVC coating protects against wear and corrosion

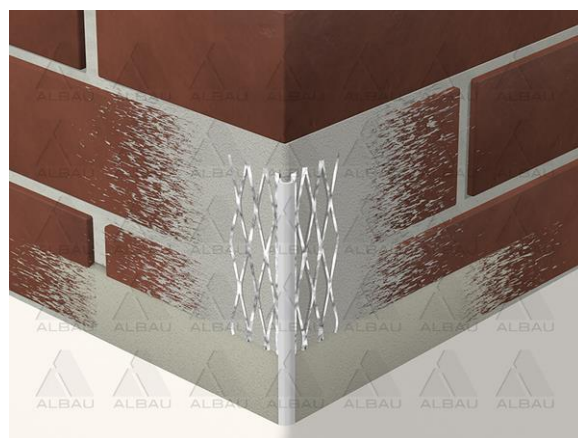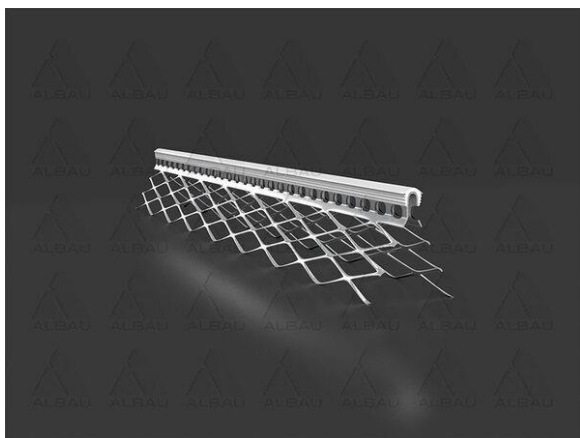

Brand	Albau
Profile material	Zinc-coated steel (DX51 Z100-200) + PVC
Profile length	3 m
Length tolerance	± 5 mm
Profile material thickness	0,4 mm
Material thickness tolerance	± 0
Wing width	37 x 37 mm
Plaster thickness	10 mm and thicker
Related norms	DIN EN 10327 + TS EN 10327 + EN 10143

Features and benefits:

- For interior and exterior plaster of 10 mm and thicker
- Applicable even on defective surfaces
- Provides superior plaster adhesion

Application:

- Cut the profile to the required length
- Apply gypsum or cement-based mortar to the corner structure every 40 cm
- Place the profile into pre-applied mortar on the corner, press into the mortar and level with spirit level



MADE IN EU

Distributor: SIA "Albau" – Tīnužu šoseja 21, Ikšķile, district Ogre, LV-5052, Latvia,
Reg.Nr.40103561205 www.albau.eu www.xbau.eu

- Cover the whole profile with plaster
- **It is forbidden to install the profile at air temperature and surface temperature below + 5°C and above + 30°C**
- It is necessary to protect the profile from direct sunlight and direct weather effects during the whole process until the plasters have dried

Packaging, storage and transport:

- Packed in carton boxes
- Store in a dry roofed place
- Transport and store in horizontal position

Product code	EAN	Profiles in transport package, pcs.	Profiles on pallet, pcs.
ALB-T-PVC-04ZN-30	4752265005547	15 (45m)	1500 (4500m)



MADE IN EU

Distributor: SIA "Albau" – Tīnužu šoseja 21, Ikšķile, district Ogre, LV-5052, Latvia,
Reg.Nr.40103561205 www.albau.eu www.xbau.eu