



## Flat countersunk head 8,2 mm with TX-Star recess, A2, partial thread



### APPROVALS

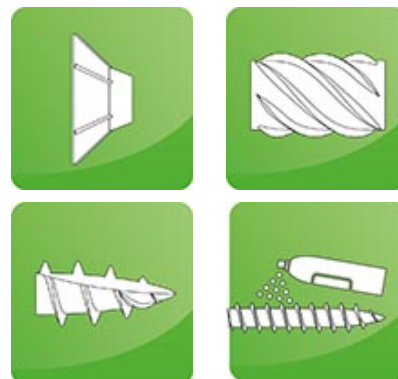

### ADVANTAGES/BENEFITS

- The stainless steel terrace screw A2 offers a high degree of weather and tannic acid resistance. These properties increase the durability of the screw.
- The Power-Fast thread reaches into the screw tip and ensures a fast bite. This makes your work noticeably easier.
- The shank ribs reduce drive-in resistance and thereby enable power and battery conservation in your work.
- The flat head geometry enables an exact and splinter-free surface finish, even with connections close to the edge.


### ADVANTAGES/BENEFITS

- The stainless steel terrace screw A2 offers a high degree of weather and tannic acid resistance. These properties increase the durability of the screw.
- The Power-Fast thread reaches into the screw tip and ensures a fast bite. This makes your work noticeably easier.
- The shank ribs reduce drive-in resistance and thereby enable power and battery conservation in your work.
- The flat head geometry enables an exact and splinter-free surface finish, even with connections close to the edge.

### FUNCTIONING

- For best results, we strongly recommend pre-drilling and pre-counterboring holes.

### TECHNICAL DATA



FTS-ST A2P

Diameter d [mm]	Length l [mm]	Drive	Art.-No.  Art.-No.	Article name	Partial thread length l <sub>g</sub> [mm]	Sales unit  [pcs]
5,0	40	TX20	<b>660602</b>	<b>FTS-ST 5,0 x 40 A2P 200</b>	24	200
5,0	50	TX20	<b>660604</b>	<b>FTS-ST 5,0 x 50 A2P 200</b>	30	200
5,0	50	TX20	<b>660605</b>	<b>FTS-ST 5,0 x 50 A2P 500</b>	30	500

Diameter	Length	Drive	Art.-No.		Partial thread length	Sales unit
d [mm]	l [mm]		Art.-No.	Article name	l <sub>g</sub> [mm]	[pcs]
5,0	60	TX20	<b>660607</b>	<b>FTS-ST 5,0 x 60 A2P 150</b>	36	150
5,0	60	TX20	<b>660608</b>	<b>FTS-ST 5,0 x 60 A2P 500</b>	36	500
5,0	70	TX20	<b>660610</b>	<b>FTS-ST 5,0 x 70 A2P 100</b>	42	100
5,0	80	TX20	<b>660612</b>	<b>FTS-ST 5,0 x 80 A2P 100</b>	50	100