



Small countersunk head 60° with TX-star recess, yellow zinc-plated, partial thread

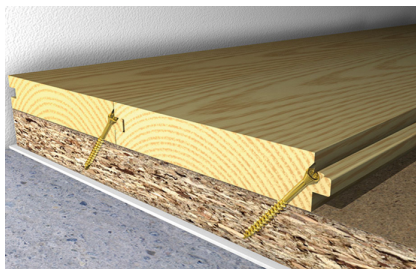

APPROVALS

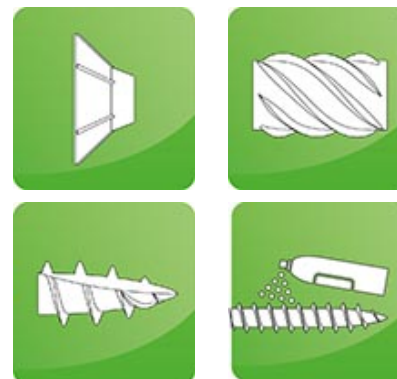

ADVANTAGES/BENEFITS

- The special screw for laying solid wooden flooring has a very narrow 60°, 6 mm countersunk head. This is specially designed for a lateral and invisible screw fitting on tongue and groove boards.
- The Power-Fast thread reaches into the screw tip and ensures a fast bite. This makes your work noticeably easier.
- The special thread geometry prevents the formation of cracks for optimal fastening of high-quality, solid wood floors.

ADVANTAGES/BENEFITS

- The special screw for laying solid wooden flooring has a very narrow 60°, 6 mm countersunk head. This is specially designed for a lateral and invisible screw fitting on tongue and groove boards.
- The Power-Fast thread reaches into the screw tip and ensures a fast bite. This makes your work noticeably easier.
- The special thread geometry prevents the formation of cracks for optimal fastening of high-quality, solid wood floors.

FUNCTIONING

- With the Power-Fast thread, the flooring screw can be handled easily and quickly without pre-drilling.

TECHNICAL DATA



FTF-ST YZP

Diameter d [mm]	Length l [mm]	Drive	Art.-No. Art.-No.	Article name	Partial thread length l _g [mm]	Sales unit [pcs]
3,5	35	TX10	660101	FTF-ST 3,5 x 35 YZP 200	24	200
3,5	45	TX10	660103	FTF-ST 3,5 x 45 YZP 200	30	200
3,5	55	TX10	660105	FTF-ST 3,5 x 55 YZP 200	36	200