


Raised csk head, PZ, yellow zinc-plated

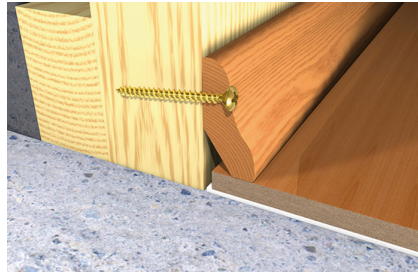

BUILDING MATERIALS

- Glued-laminated timber
- Cross-laminated timber
- Laminated veneer plywood panels (e.g. Multiplex)
- Hard woods (pre-drilled)
- Chipboards and oriented strand boards (e.g. OSB panels)
- Plywood
- Solid wood panels
- Soft woods
- And many other wood materials

ADVANTAGES/BENEFITS

- The unique Power-Fast thread reaches into the screw tip and ensures a fast bite. This makes your work noticeably easier with all wood materials.
- The shank ribs (for screws with partial thread from 50 mm in length and up) substantially reduce drive-in resistance and thus enable greater power and battery conservation in your work.
- The optimised head geometry enables an exact and splinter-free surface finish without the screw twisting off, even with connections close to the edge.
- The ETA approval guarantees the high safety standard and the premium quality of fischer Power-Fast screws.

APPLICATIONS

- General wood joints
- Finger tightening elements
- Safety-relevant applications
- Plankings
- Skirting
- Door and metal fittings

APPROVALS



FUNCTIONING

- Screws with partial threads can lock wood parts into place by tightening them against each other.
- Full-thread screws are recommended for mounting thin parts and in less firm wood materials (e.g. soft woods).
- Screws with countersunk head can be flush mounted with the wood.
- Pan-Head screws are particularly well suited for metal and wood joints.
- The raised countersunk head is particularly suitable for joints where the screw head is visible and needs to leave behind an attractive appearance.

TECHNICAL DATA



FPF-LZ YZF

Diameter 3,0

Diameter d [mm]	Length l [mm]	Drive	Art.-No. Art.-No.	Article name	ETA-approval	Full thread length l _g [mm]	Sales unit [pcs]
3,0	20	PZ1	653668	FPF-LZ 3,0 x 20 YZF 500	■	16	500
3,0	25	PZ1	653670	FPF-LZ 3,0 x 25 YZF 500	■	21	500
3,0	30	PZ1	653672	FPF-LZ 3,0 x 30 YZF 500	■	26	500

Diameter 3,5

Diameter d [mm]	Length l [mm]	Drive	Art.-No.	Article name	ETA-approval	Full thread length l _g [mm]	Sales unit [pcs]
3,5	25	PZ2	653676	FPF-LZ 3,5 x 25 YZF 500	■	21	500
3,5	30	PZ2	653678	FPF-LZ 3,5 x 30 YZF 500	■	26	500
3,5	35	PZ2	653680	FPF-LZ 3,5 x 35 YZF 500	■	31	500
3,5	40	PZ2	653682	FPF-LZ 3,5 x 40 YZF 500	■	36	500

Diameter 4,0

Diameter d [mm]	Length l [mm]	Drive	Art.-No.	Article name	ETA-approval	Full thread length l _g [mm]	Sales unit [pcs]
4,0	30	PZ2	653686	FPF-LZ 4,0 x 30 YZF 500	■	25	500
4,0	35	PZ2	653688	FPF-LZ 4,0 x 35 YZF 500	■	30	500
4,0	40	PZ2	653690	FPF-LZ 4,0 x 40 YZF 500	■	35	500

Diameter 4,5

Diameter d [mm]	Length l [mm]	Drive	Art.-No.	Article name	ETA-approval	Full thread length l _g [mm]	Sales unit [pcs]
4,5	50	PZ2	653692	FPF-LZ 4,5 x 50 YZF 200	■	45	200
4,5	60	PZ2	653694	FPF-LZ 4,5 x 60 YZF 200		55	200