
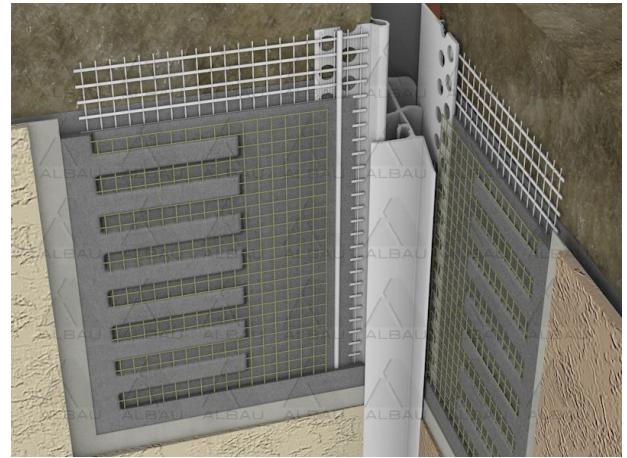


EM V40 25 / Movement profile for protrusive surface

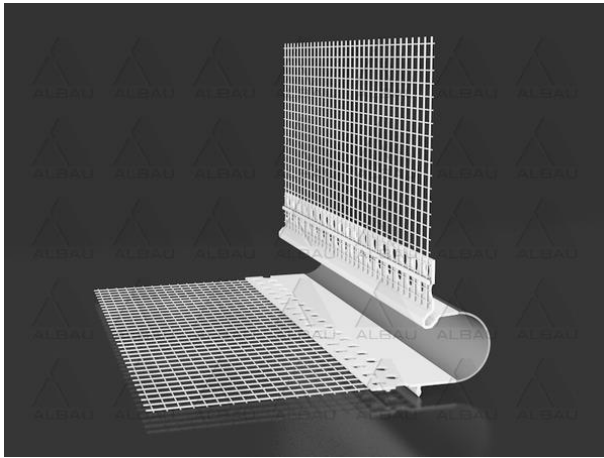

Application: Corner PVC movement profile V, with glass fibre mesh. Movement profile V type – for corners, is used for moving joints 10-30 mm. This profile may be used only in vertical position. Universal profile size is suitable for all insulation material widths in insulation system ETICS. Movement profile need to be used together with rubber plug EM COV, because it protects expansion/moving joint from dirt, mechanical damage and creates an aesthetically finish design. Glass fibre mesh meet the ETAG 004 requirements.

Comply with ETICS insulation system

Advantages:

- Protection against arising cracks due to insulation material tension;
- Provides an equal dilatation connection;
- Dilatation functionality 10-30 mm;
- The profile dilatation part is made of a resistant, soft PVC;
- The permanent joint sealing, resistant against outer atmosphere;
- Prevention of entry of pollution and humidity under the insulation material;
- Universal profile size, suitable to all insulation material widths.

Technical data:

Product code	EAN	Material	PVC dimension	Length	Package
ALB-EM-V40-25	4751023400181	PVC	40 mm	2,5 m	25 pcs.

Installation tips:

- During the connecting, protrusive dilatation part has to be carried over the lower profile;
- Use only in vertical position;
- Perform the cutting with special profile scissors.

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place the temperature range of -5°C to +40°C. Maximum recommended storage time is 24 months



MADE IN EUROPE

Distributor: Ltd "Albau" – Ritvari, Rumbula, Stopinu district, LV-2121, Latvia. Reg.No. – 40103561205
www.albau.eu www.xbau.eu