
	ALBAU LTD	V 03
	Product technical data sheet	v1
		Page 1
		Pages 1

Product Information
DB –Floor piping collar
SWP-80-29333
SWP-80-350X350

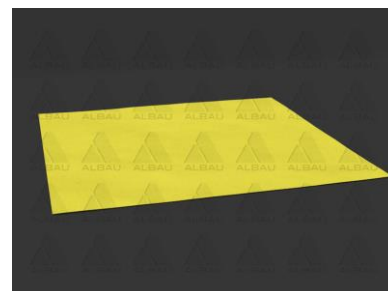

Description:	Special floor piping collar made from non-woven and a flexible coating. Additional 20 mm perforation.	
Material composition:	<u>Substrate:</u> Two outer layers of polypropylene non-woven <u>Coating:</u> Thermoplastic elastomer, resistant to ageing	
Application:	Sealing for water pipes	
Colour:	Yellow	
Total size:	425 mm x 425 mm	
Total thickness (approx):	0,9 mm	
Material weight (approx.):	92,0 g / piece	
Resistance to temperature: min. / max.	- 30°C / + 90°C	
Physical Properties: (approx.)	DIN	Value
Burst pressure: max.	Internal	> 1,5 bar
Resistance to water pressure	DIN EN 1928 (Version B)	> 1,5 bar
Chemical Properties:	Resistance after storage over 7 days by room temperature in following chemicals	+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal	+
Sulphuric acid 35%	Internal	+
Citric acid 100g/l	Internal	+
Lactic acid 5%	Internal	+
Potassium hydroxide 3% / 20%	Internal	+ / +
Sodium hypochlorite 0,3g/l	Internal	+
Salt water (20g/l Sea water salt)	Internal	+

Certified according to DIN EN ISO 9001: 2008

Made in Europe

Warranty: 5 years warranty for the guaranteed product qualities

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The above technical data represent average values. The technical information and application instructions are based on our experience and present knowledge. However, it is each users own responsibility to make trials with the original substrates in order to verify the suitability of our products for the intended purpose, taking into consideration all application related parameters. Please contact us if you have any further questions.