
	ALBAU LTD	<b>V 03</b>
	<b>Product technical data sheet</b>	v1
		Page 1
		Pages 1

**Product Information**  
**DIN - Inside corner**  
Article No. SWP-80-29145  
EAN – 4751006566545

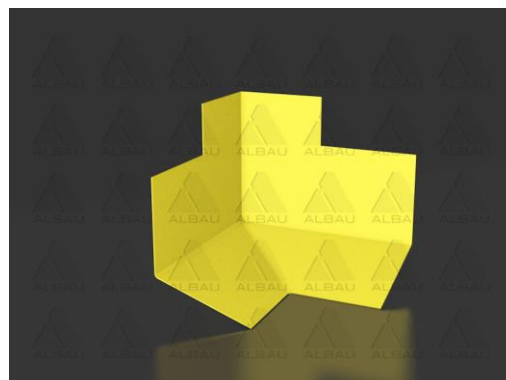

<b>Description:</b>	Special inside corner made from non-woven and a flexible coating.	
Material composition:	<u>Substrate:</u> Two outer layers of polypropylene non-woven <u>Coating:</u> Thermoplastic elastomer, resistant to ageing	
Application:	Sealing for construction corners in addition with waterproofing tapes	
Colour:	Yellow	
Side length: (approx.)	1160 - 122 mm	
Height: (approx.)	60 mm / 90 mm	
Total thickness (approx.):	0,75 mm	
Material weight (approx.):	13 g / piece	
Resistance to temperature: min. / max.	- 30°C / + 90°C	
<b>Physical Properties: (approx.)</b>	<b>DIN</b>	<b>Value</b>
Burst pressure: max.	Internal	> 1,5 bar
Resistance to water pressure	DIN EN 1928 (Version B)	> 1,5 bar
<b>Chemical Properties:</b>	Resistance after storage over 7 days by room temperature in following chemicals	+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal	+
Sulphuric acid 35%	Internal	+
Citric acid 100g/l	Internal	+
Lactic acid 5%	Internal	+
Potassium hydroxide 3% / 20%	Internal	+ / +
Sodium hypochlorite 0,3g/l	Internal	+
Salt water (20g/l Sea water salt)	Internal	+

**Certified according to DIN EN ISO 9001: 2008**

**Made in Europe**

**Warranty:** 5 years warranty for the guaranteed product qualities

**Storage:** cool and dry, protect against sunlight, use within 24 months after receipt.

The above technical data represent average values. The technical information and application instructions are based on our experience and present knowledge.

However, it is each users own responsibility to make trials with the original substrates in order to verify the suitability of our products for the intended purpose, taking into consideration all application related parameters. Please contact us if you have any further questions.