



## EKSPLOATĀCIJAS ĪPAŠĪBU DEKLARĀCIJA

**fischer** innovative solutions

Nr. 0011 – LV

1. Unikāls izstrādājuma tipa identifikācijas numurs: **fischer Superbond**

2. Paredzētais izmantojums:

Produkts	Paredzētais lietojums
Metāl enkurstiprinājumi izmantošanai betonā (smagā tipa)	Nesošo elementu vai smagu elementu, piemēram, apšuvuma vai iekaramo griestu stiprināšanai un/vai atbalstīšanai pie betona, skatīt pielikumus, jo īpaši pielikumus B 1 - B 12

3. Ražotājs: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany**

4. Pilnvarotais pārstāvis: --

5. Ekspluatācijas īpašību noturības novērtējuma un pārbaudes (AVCP) sistēma(-as): 1

6a. Saskaņotais standarts: ---

Paziņotā(-ās) iestāde(-es): ---

6b. Eiropas novērtējuma dokuments: **ETAG 001; 2013-04**Eiropas tehniskais novērtējums: **ETA-12/0258; 2015-03-23**Tehniskā novērtējuma iestāde: **DIBt**Paziņotā(-ās) iestāde(-es): **1343 – MPA Darmstadt**

7. Deklarētā(-ās) ekspluatācijas īpašība(-as):

**Mehāniskā izturība un stabilitāte (BWR 1)**

Svarīgākie raksturielumi	Ekspluatācijas īpašības
Raksturīgās vērtības zem statiskās un kvazistatiskās slodzes konstrukcijām aprēķināšanai saskaņā ar TR 029 vai CEN/TS 1992-4:2009, Nobīde	Skatīt pielikumus, jo īpaši pielikumus C 1 - C 10
Raksturīgā izturība seismoizturības kategorijai C1 un C2 aprēķināšanai saskaņā ar Tehnisko ziņojumu TR 045, nobīdes	Skatīt pielikumus, jo īpaši pielikumus C 11 - C 13

**Drošība ugunsgrēka gadījumā (BWR 2)**

Svarīgākie raksturielumi	Ekspluatācijas īpašības
Reakcija uz uguni	Enkurstiprinājumi atbilst A 1 klases prasībām
Ugunsizturība	Nav noteikts (NPD)

8. Atbilstīgā tehniskā dokumentācija un/vai īpašā tehniskā dokumentācija: ---

Iepriekš norādītā izstrādājuma ekspluatācijas īpašības atbilst deklarēto ekspluatācijas īpašību kopumam. Šī ekspluatācijas īpašību deklarācija izdota saskaņā ar Regulu (ES) Nr. 305/2011, un par - ir atbildīgs vienīgi iepriekš norādītais ražotājs..

Parakstīts ražotāja vārdā:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2015-03-30

- Šī deklarācija par tehniskajiem raksturojumiem ir sagatavota dažādās valodās. Gadījumos, ja rodas strīdi attiecībā uz skaidrojumu, prioritāte vienmēr ir angļu versijai.

- Pielikums satur brīvprātīgi sniegtu papildu informāciju angļu valodā, kas pārsniedz (norādīts neatkarīgi no valodas) likumā noteiktās prasības.

## Specific Part

### 1 Technical description of the product

The fischer injection system FIS SB is a bonded anchor consisting of a cartridge with injection mortar fischer FIS SB, FIS SB Low Speed or FIS SB High Speed or a mortar capsule fischer RSB and a steel element. The steel element consist of

- a threaded rod with washer and hexagon nut of sizes M8 to M30 or
- internal threaded anchor RG MI of sizes M8 to M20 or
- a deformed reinforcing bar of sizes  $\phi = 8$  to 32 mm or
- a fischer rebar anchor FRA of sizes M12 to M24

The steel element is placed into a drilled hole filled with injection mortar or a mortar capsule RSB and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values under static and quasi-static action for design according to TR 029 or CEN/TS 1992-4:2009, Displacements	See Annex C 1 to C 10
Characteristic values for seismic performance categories C1 and C2 for design according to Technical Report TR 045, Displacements	See Annex C 11 to C 13

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorages satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

**3.3 Hygiene, health and the environment (BWR 3)**

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

**3.4 Safety in use (BWR 4)**

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**3.5 Protection against noise (BWR 5)**

Not applicable.

**3.6 Energy economy and heat retention (BWR 6)**

Not applicable.

**3.7 Sustainable use of natural resources (BWR 7)**

The sustainable use of natural resources was not investigated.

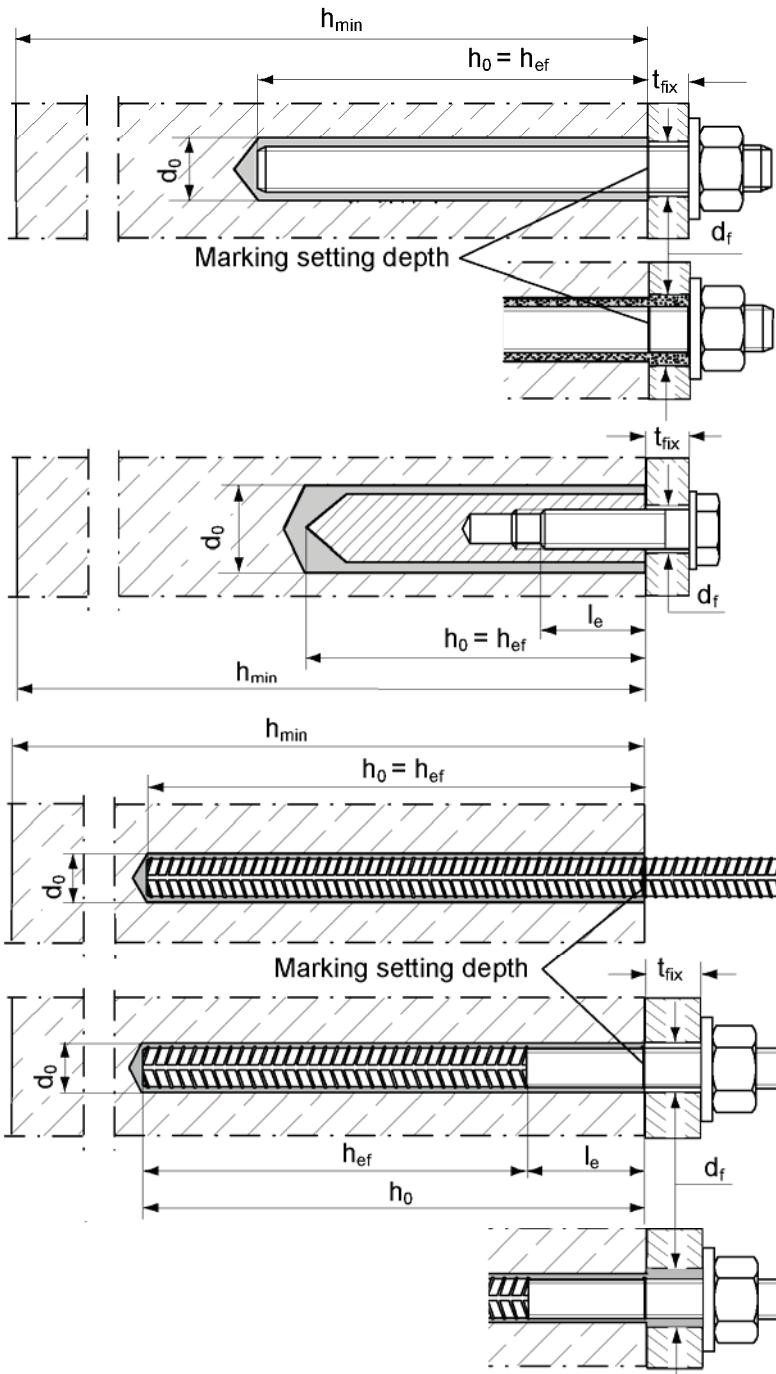
**3.8 General aspects**

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**




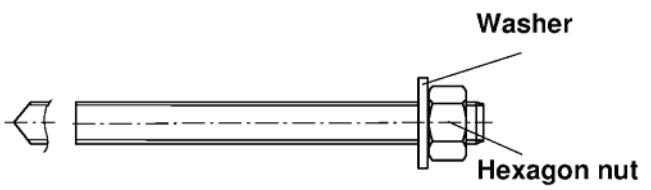
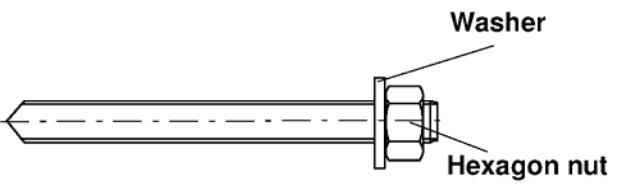
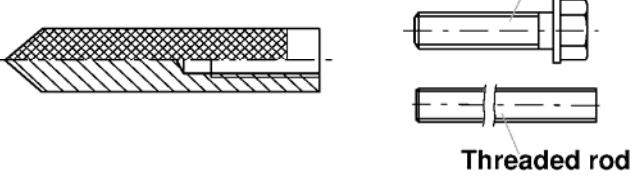
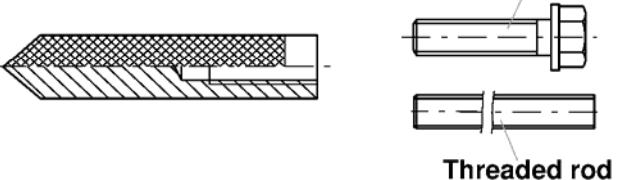

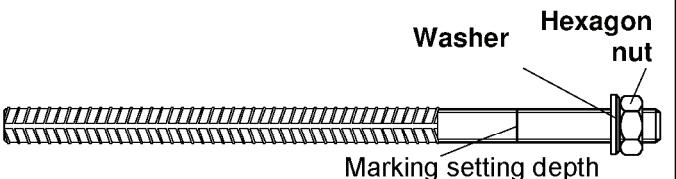
According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

<b>Product</b>	<b>Intended use</b>	<b>Level or class</b>	<b>System</b>
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1

**Installation conditions**

fischer Superbond

**Product description**  
 Installation conditions
**Annex A 1**

<b>Injection system FIS SB</b>	<b>Resin capsule system RSB</b>
<p>Imprint: FIS SB, FIS SB High Speed, Processing notes, shelf-life, piston travel scale, curing and processing times (depending on temperature), hazard code, size.</p>  <p>Sizes: 390ml, 585ml, 1100ml, 1500ml</p> <p>Static mixer MR or UMR</p>  <p>Injection-adapter</p>  <p>Extension tube</p> 	<p>Resin capsule RSB</p> 
<p><b>fischer threaded rod FIS A or RGM</b> Size: M8, M10, M12, M16, M20, M24, M27, M30</p>  <p>Washer</p> <p>Hexagon nut</p>	<p><b>fischer threaded rod RGM</b> Size: M8, M10, M12, M16, M20, M24, M30</p>  <p>Washer</p> <p>Hexagon nut</p>
<p><b>fischer internal threaded anchor RG MI</b> Size: M8, M10, M12, M16, M20</p>  <p>Screw</p> <p>Threaded rod</p>	<p><b>fischer internal threaded anchor RG MI</b> Size: M8, M10, M12, M16, M20</p>  <p>Screw</p> <p>Threaded rod</p>
<p><b>Reinforcing bar</b> Size: Ø8, Ø10, Ø12, Ø14, Ø16, Ø20, Ø25, Ø28, Ø32</p>  <p>Marking setting depth</p> <p><b>fischer rebar anchor FRA</b> Size: M12, M16, M20, M24</p>  <p>Washer</p> <p>Hexagon nut</p> <p>Marking setting depth</p>	
<p><b>fischer Superbond</b></p> <p><b>Product description</b> Mortar system and capsule system</p>	<p><b>Annex A 2</b></p>

**Table A1: Materials**

Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener, filler		
		Steel, zinc plated	Stainless steel A4	High corrosion-resistant steel C
2	Threaded rod	Property class 5.8 or 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_s > 12\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_s > 12\%$ fracture elongation	Property class 50 or 80 EN ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_s > 12\%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$ , ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014
5	fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$ , ISO 4042:1999 A2K	Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Screw or threaded rod for fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$ , ISO 4042:1999 A2K	Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
7	Reinforcing bar EN 1992-1-1:2004 and AC:2010, Annex C	Bars and de-coiled rods class B or C with $f_{yk}$ and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$ (k see Annex B 4)		
8	fischer rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with $f_{yk}$ and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$ (k see Annex B 4)	Threaded part: Property class 70 ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014	

fischer Superbond	
Product description Materials	<b>Annex A 3</b>

## Specifications of intended use (part 1)

**Table B1:** Overview use categories and performance categories

Mortar system FIS SB with ...												
Anchorages subject to	Threaded rod	fischer internal threaded anchor RG MI	Reinforcing bar	fischer rebar anchor FRA								
Hammer drilling	all sizes											
Diamond drilling	Not permitted											
Static and quasi-static load, in	un-cracked concrete cracked concrete	all sizes	Tables: C1; C3; C5; C11; C12	all sizes	Tables: C3; C6; C13; C14	all sizes	Tables: C7; C9; C15; C16	all sizes				
Seismic performance category (only hammer drilling)	C1 C2	M8 – M30 M12, M16, M20, M24	Table C19 Table C21	-----	Ø 8 – Ø 32	Table C20	-----	-----				
Use category	Dry or wet concrete Flooded hole	all sizes										
Capsule system RSB with ...												
Hammer drilling	all sizes		Permitted $\geq \varnothing 18$ mm		Not permitted		Not permitted					
Diamond drilling	RGM M16 to M30		Permitted $\geq \varnothing 18$ mm		Not permitted		Not permitted					
Static and quasi-static load, in	un-cracked concrete cracked concrete	all sizes	Tables: C1; C2; C3; C5; C11; C12	M10 – M20	Tables: C3; C4; C6; C13; C14	---	---	---				
Seismic performance category (only hammer drilling)	C1 C2	M8 – M30 ----	Table C19 ----	-----	-----	-----	-----	-----				
Use category	Dry or wet concrete Flooded hole	RGM all sizes		All sizes		---	---	---				
fischer Superbond							<b>Annex B 1</b>					
Intended Use Specifications (part 1)							<b>Annex B 1</b>					

## Specifications of intended use (part 2)

Installation temperature		+5°C to +40°C	
In-service temperature	Temperature range I	-40°C to +40°C	(max. long term temperature +24°C and max. short term temperature +40°C)
	Temperature range II	-40°C to +80°C	(max. long term temperature +50°C and max. short term temperature +80°C)
	Temperature range III	-40°C to +120°C	(max. long term temperature +72°C and max. short term temperature +120°C)
	Temperature range IV	-40°C to +150°C	(max. long term temperature +90°C and max. short term temperature +150°C)

### Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions  
(zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist  
(stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition or in other particular aggressive conditions (high corrosion resistant steel)  
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

### Design:

- Anchorage have to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorage under static or quasi-static actions are designed in accordance with: TR 029
- Anchorage under seismic actions have to be designed in accordance with: TR 045

### Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: The hole shall be filled with mortar
- Marking and keeping the effective anchorage depth

### Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according to Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents should be stored
- Marking of embedment depth

fischer Superbond

Intended Use  
Specifications (part 2)

Annex B 2

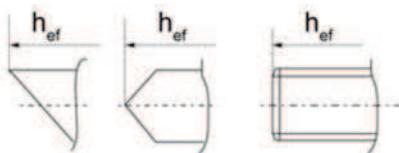
**Table B2:** Installation parameters for threaded rods

Size		M8	M10	M12	M16	M20	M24	M27	M30
Width across flat	SW [mm]	13	17	19	24	30	36	41	46
Nominal drill bit diameter	$d_0$ [mm]	10	12	14	18	24	28	30	35
Depth of drill hole	$h_0$ [mm]					$h_0 = h_{ef}$			
Injection mortar FIS SB	Effective anchorage depth	$h_{ef,min}$ [mm]	60	60	70	80	90	96	108
		$h_{ef,max}$ [mm]	160	200	240	320	400	480	540
Diameter of clearance hole in the fixture <sup>1)</sup>	pre-positioned anchorage	$\leq d_f$ [mm]	9	12	14	18	22	26	30
	push through anchorage	$\leq d_f$ [mm]	11	14	16	20	26	30	33
Resin capsule RSB	Nominal drill bit diameter	$d_0$ [mm]	10	12	14	18	25	28	---
	Depth of drill hole	$h_0$ [mm]					$h_0 = h_{ef}$		35
Effective anchorage depth	$h_{ef,1}$ [mm]	---	75	75	95	---	---	---	---
	$h_{ef,2}$ [mm]	80	90	110	125	170	210	---	280
	$h_{ef,3}$ [mm]	---	150	150	190	210	---	---	---
Diameter of clearance hole in the fixture <sup>1)</sup>	Only pre-positioned anchorage	$\leq d_f$ [mm]	9	12	14	18	22	26	---
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$ [mm]	40	45	55	65	85	105	120	140
Minimum thickness of concrete member	$h_{min}$ [mm]				$h_{ef} + 30 (\geq 100)$			$h_{ef} + 2d_0$	
Maximum torque moment	$\max T_{inst}$ [Nm]	10	20	40	60	120	150	200	300


<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1

### fischer threaded rod:

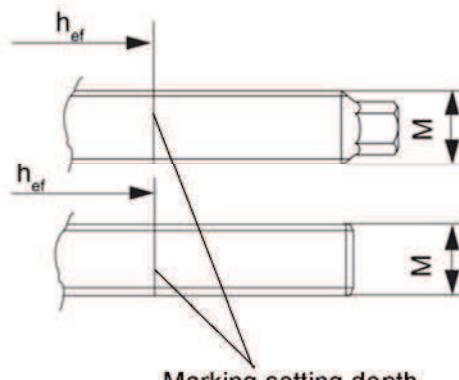
Alternative point geometry threaded rod FIS A



Alternative point geometry threaded rod RGM



Alternative head geometry threaded rod FIS A and RGM



### Marking (on random place):

Property class 8.8 or high corrosion-resistant steel, property class 80: •

Stainless steel A4, property class 50 and high corrosion-resistant steel, property class 50: ••

fischer Superbond

### Intended Use

Installation parameters threaded rods

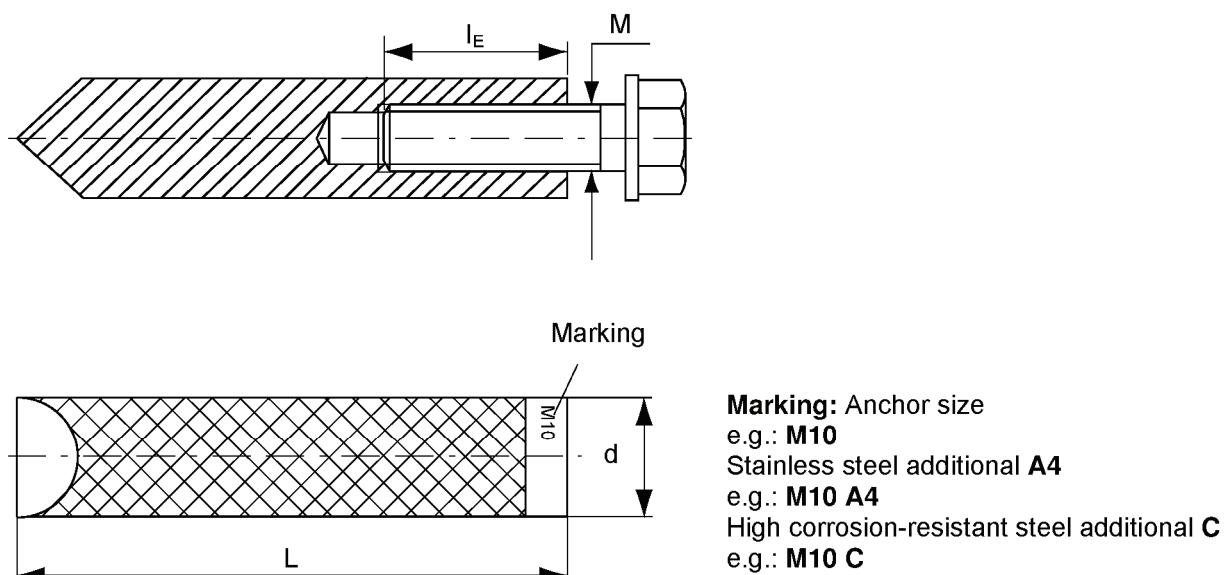
**Annex B 3**

**Table B3:** Installation parameters fischer internal threaded anchors RG MI

Size	M8	M10	M12	M16	M20
Diameter of anchor $d_H$ [mm]	12	16	18	22	28
Nominal drill bit diameter $d_0$ [mm]	14	18	20	24	32
Drill hole depth $h_0$ [mm]			$h_0 = h_{ef}$		
Effective anchorage depth ( $h_{ef} = L_H$ ) $h_{ef}$ [mm]	90	90	125	160	200
Maximum torque moment $\max T_{inst}$ [Nm]	10	20	40	80	120
Minimum spacing $s_{min}$ [mm]	55	65	75	95	125
Minimum edge distance $c_{min}$ [mm]	55	65	75	95	125
Diameter of clearance hole in the fixture <sup>1)</sup> $d_f$ [mm]	9	12	14	18	22
Minimum thickness of concrete member $h_{min}$ [mm]	120	125	165	205	260
Maximum screw-in depth $l_{E,max}$ [mm]	18	23	26	35	45
Minimum screw-in depth $l_{E,min}$ [mm]	8	10	12	16	20

<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1

### fischer internal threaded anchor RG MI



Fastening screw or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Table A1

fischer Superbond

**Intended Use**  
Installation parameters fischer internal threaded anchors RG MI

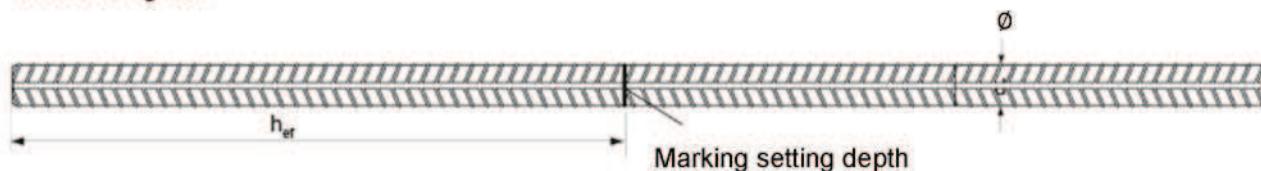
**Annex B 4**

**Table B4:** Installation parameters reinforcing bars

Nominal bar size	$\emptyset$	8 <sup>1)</sup>	10 <sup>1)</sup>	12 <sup>1)</sup>		14	16	20	25	28	32
Nominal drill bit diameter	$d_0$ [mm]	(10)12	(12)14	(14)	16	18	20	25	30	35	40
Drill hole depth	$h_0$ [mm]					$h_0 = h_{\text{ef}}$					
Effective anchorage depth	$h_{\text{ef},\text{min}}$ [mm]	60	60	70		75	80	90	100	112	128
	$h_{\text{ef},\text{max}}$ [mm]	160	200	240		280	320	400	500	560	640
Minimum spacing	$s_{\text{min}}$ [mm]	40	45	55		60	65	85	110	130	160
Minimum edge distance	$c_{\text{min}}$ [mm]	40	45	55		60	65	85	110	130	160
Minimum thickness of concrete member	$h_{\text{min}}$ [mm]			$h_{\text{ef}} + 30 \geq 100$					$h_{\text{ef}} + 2d_0$		

<sup>1)</sup> Both drill bit diameters can be used.

#### Reinforcing bar



Properties of reinforcement: refer to EN 1992-1-1 Annex C, Table C.1 and C.2N

Product form		Non-zinc-plated bars and de-coiled rod		
Class		B	C	
Characteristic yield strength $f_{yk}$ or $f_{0,2k}$ [MPa]		400 to 600		
Minimum value of $k = (f_t / f_y)_k$		$\geq 1,08$	$\geq 1,15$	
			$< 1,35$	
Characteristic strain at maximum force $\varepsilon_{uk}$ [%]		$\geq 5,0$	$\geq 7,5$	
Bentability		Bend / Rebend test		
Maximum deviation from nominal mass (individual bar) [%]	Nominal bar size [mm]	$\leq 8$	$\pm 6,0$	
		$> 8$	$\pm 4,5$	
Bond: Minimum relative rib area, $f_{R,min}$ (determination acc. to EN 15630)	Nominal bar size [mm]	8 to 12	0,040	
		$> 12$	0,056	

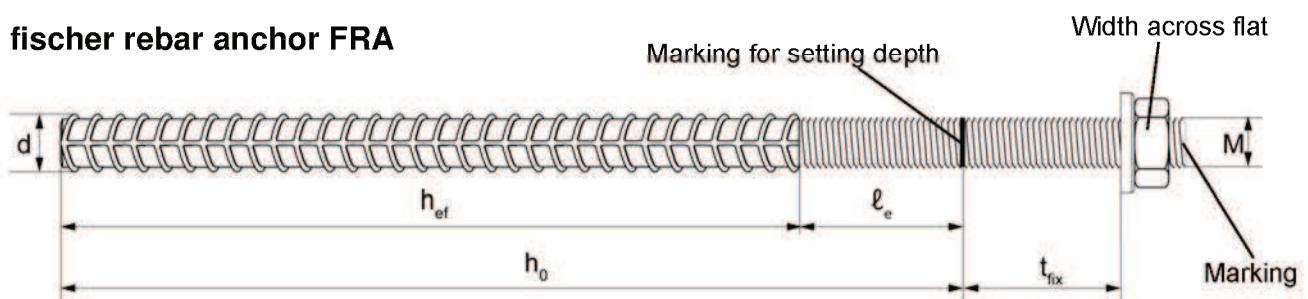
#### Rib height $h$ :

The rib height  $h$  must be  $0,05 * \emptyset \leq h \leq 0,07 * \emptyset$   
 $\emptyset$  = nominal bar size

fischer Superbond	Annex B 5
Intended Use Installation parameters reinforcing bars	

**Table B5:** Installation parameters fischer rebar anchor FRA

Thread diameter		M12 <sup>1)</sup>	M16	M20	M24
Nominal bar size	$\emptyset$ [mm]	12	16	20	25
Width across flat	SW [mm]	19	24	30	36
Nominal drill bit diameter	$d_0$ [mm]	(14) 16	20	25	30
Depth of drill hole ( $h_0 = l_{ges}$ )	$h_0$ [mm]			$h_{ef} + l_e$	
Distance concrete surface to welded join	$l_e$ [mm]			100	
Effective anchorage depth	$h_{ef,min}$ [mm]	70	80	90	96
	$h_{ef,max}$ [mm]	140	220	300	380
Maximum torque moment	max $T_{inst}$ [Nm]	40	60	120	150
Minimum spacing	$s_{min}$ [mm]	55	65	85	105
Minimum edge distance	$c_{min}$ [mm]	55	65	85	105
Diameter of clearance hole in the fixture <sup>2)</sup>	Pre-positioned anchorage $\leq d_f$ [mm]	14	18	22	26
	Push through anchorage $\leq d_f$ [mm]	18	22	26	32
Minimum thickness of concrete member	$h_{min}$ [mm]	$h_{ef} + 30 \geq 100$			$h_{ef} + 2d_0$

<sup>1)</sup> Both drill bit diameters can be used<sup>2)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1**fischer rebar anchor FRA**

Marking: on head e.g.: FRA (for stainless steel);  
 FRA C (for high corrosion-resistant steel)

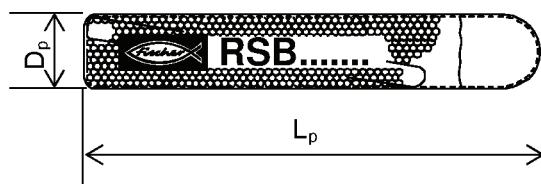
fischer Superbond

**Intended Use**  
 Installation parameters fischer rebar anchor FRA

**Annex B 6**

**Table B6:** Dimensions of resin capsule RSB

Capsule	[-]	RSB 8	RSB 10 mini	RSB 10	RSB 12 mini	RSB 12	RSB 16 mini	RSB 16	RSB 16 E	RSB 20	RSB 20 E /24	RSB 30
Diameter	$D_p$ [mm]	9,0		10,5		12,5		16,5		23,0		27,5
Length	$L_p$ [mm]	85	72	90	72	97	72	95	123	160	190	260

**Table B7:** Allocation Resin capsule RSB to fischer threaded rods RGM

Size	M8	M10	M12	M16	M20	M24	M30
Nominal drill bit diameter $d_0$ [mm]	10	12	14	18	25	28	35
Minimum setting depth $h_{ef,1}$ [mm]	---	75	75	95	---	---	---
Associated resin capsule RSB [-]	---	10mini	12mini	16mini	---	---	---
Medium setting depth $h_{ef,2}$ [mm]	80	90	110	125	170	210	280
Associated resin capsule RSB [-]	8	10	12	16	20	20 E/24	30
Maximum setting depth $h_{ef,3}$ [mm]	---	150	150	190	210	---	---
Associated resin capsule RSB [-]	---	2x10mini	2x12mini	2x16mini	20 E/24	---	---

**Table B8:** Allocation resin capsule RSB to fischer internal threaded anchor RG MI

Size	M8	M10	M12	M16	M20
Nominal drill bit diameter $d_0$ [mm]	14	18	20	24	32
Setting depth $h_{ef}$ [mm]	90	90	125	160	200
Associated resin capsule RSB [-]	10	12	16	16 E	20 E/24

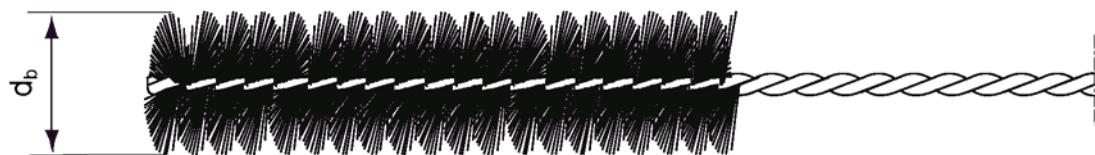
fischer Superbond

**Intended Use**  
 Resin capsule RSB  
 Parameters and allocations

**Annex B 7**

**Table B9:** Parameters of steel brush FIS BS Ø

Drill bit diameter	[mm]	10	12	14	16	18	20	24	25	28	30	32	35	40
Steel brush diameter $d_b$	[mm]	11	14	16	20		25	26	27	30		40		42

**Table B10:** Maximum permissible processing times and minimum curing times  
(minimum cartridge temperature 5°C; minimum capsule temperature -15°C)

Temperature in the anchorage base [°C]	Maximum processing time $t_{work}$ [minutes]		Minimum curing time $t_{cure}$ [minutes]		
	FIS SB	FIS SB High Speed	FIS SB	FIS SB High Speed	RSB
-30 to -20	-----	—	---	---	120 hours
>-20 to -15	-----	60	---	24 hours	48 hours
>-15 to -10	60	30	36 hours	8 hours	30 hours
>-10 to -5	30	15	24 hours	3 hours	16 hours
>-5 to ±0	20	10	8 hours	2 hours	10 hours
>±0 to +5	13	5	4 hours	1 hour	45
>+5 to +10	9	3	120	45	30
>+10 to +20	5	2	60	30	20
>+20 to +30	4	1	45	15	5
>+30 to +40	2	---	30	---	3

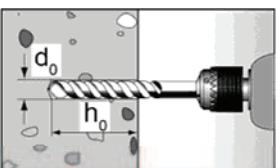
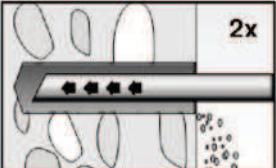
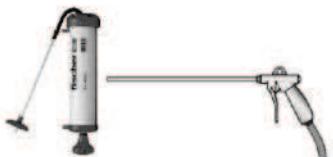
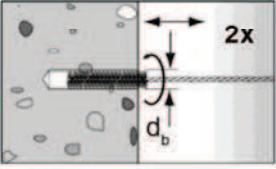
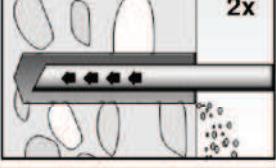
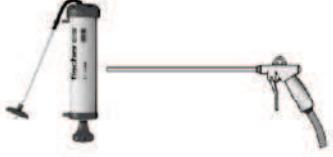
fischer Superbond

**Intended Use**  
Cleaning tools  
Processing times and curing times

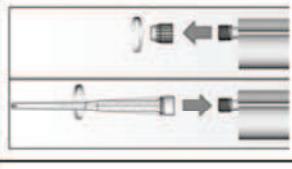
**Annex B 8**

## Installation instructions part 1

### Drilling and cleaning the hole (hammer-drilling) for mortar system FIS SB

1		Drill the hole. Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>Tables B2, B3, B4, B5</b> .
2		Blow out the drill hole twice with oil-free compressed air ( $p \geq 6$ bar). The use of a manual blow-out pump is possible in un-cracked concrete, if at the same time the drill hole diameter is less than 18 mm and the embedment depth $h_{ef}$ is less than $10d$ . 
3		Brush the drill hole two times. For deep holes use an extension. Corresponding brushes see <b>Table B9</b>
4		Blow out the drill hole twice with oil-free compressed air ( $p \geq 6$ bar). The use of a manual blow-out pump is possible in un-cracked concrete, if at the same time the drill hole diameter is less than 18 mm and the embedment depth $h_{ef}$ is less than $10d$ . 

## Preparing the cartridge

5		Twist off the sealing cap Twist on the static mixer (the spiral in the static mixer must be clearly visible).
6		Place the cartridge into the dispenser.
7		Press approx. 10 cm of material out until the resin is evenly grey in colour. Don't use mortar that is not uniformly grey.

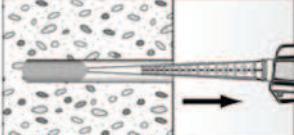
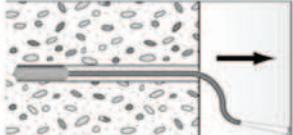
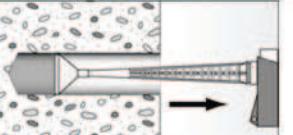
fischer Superbond

Intended use  
Installation instructions part 1

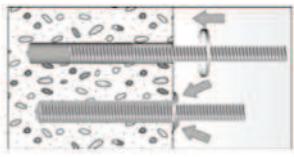
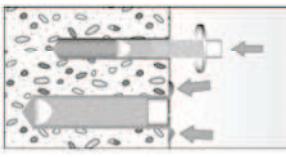
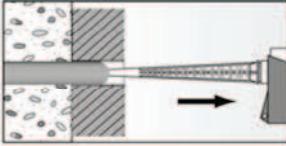

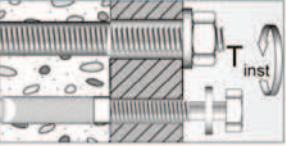
Annex B 9

## Installation instructions part 2

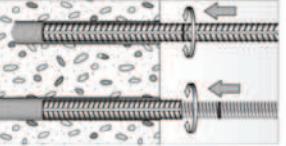
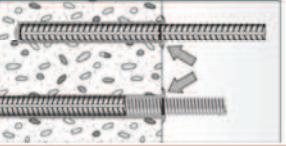
### Injection of the mortar

8			
	Fill approx. 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles.	For drill hole depth $\geq 150$ mm use an extension hose.	For overhead installation, deep holes $h_0 > 250$ mm or drill hole diameter $d_0 \geq 40$ mm use an injection-adapter.

## Installation threaded rods or fischer internal threaded anchors RG MI

9			Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Press the threaded rod or fischer internal threaded anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must emerge around the anchor element.	
		For overhead installations support the anchor rod with wedges.		For push through installation fill the annular clearance with mortar.
10		Wait for the specified curing time, $t_{\text{cure}}$ see Table B10.	 $T_{\text{inst}}$	Mounting the fixture max $T_{\text{inst}}$ see Tables B2, B3.

## Installation reinforcing bars and fischer FRA

9		Only use clean and oil-free rebars. Mark the setting depth of the reinforcement bar or the FRA vigorously into the filled hole up to the insertion depth marking.		
		When reaching the setting depth mark, excess mortar must emerge from the mouth of the drill hole.		
10		Wait for the specified curing time $t_{\text{cure}}$ see Table B10.	 $T_{\text{inst}}$	Mounting the fixture max $T_{\text{inst}}$ see Table B5.

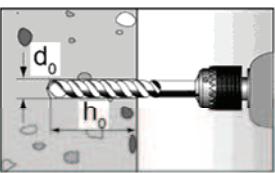
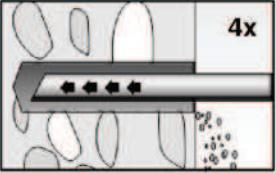
fischer Superbond

Intended use  
Installation instructions part 2

Annex B 10

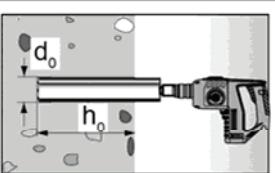
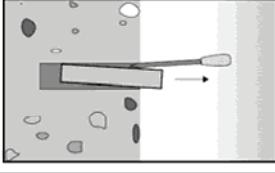
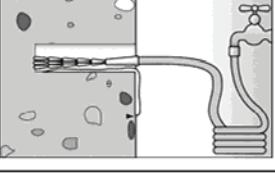
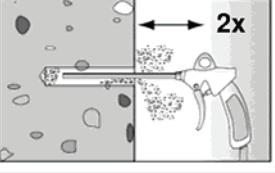
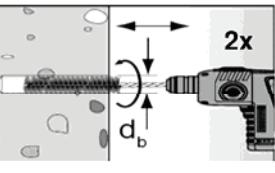
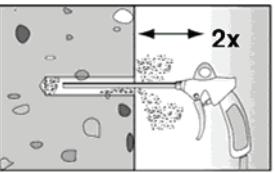
### Installation instructions part 3

#### Drilling and cleaning the hole (hammer-drilling) for capsule RSB

1		Drill the hole. Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>Tables B2, B3, B4, B5</b> .
2		Blow out the drill hole four times with oil-free compressed air ( $p \geq 6$ bar). The use of a manual blow-out pump is possible in un-cracked concrete, if at the same time the drill hole diameter is less than 18 mm and the embedment depth $h_{ef}$ is less than $10d$ .



#### Drilling and cleaning the hole (diamond-drilling) for capsule RSB

1		Drill the hole. Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>Tables B2, B3</b> .		Break the drill core and draw it out.
2		Flush the drill hole until the water comes clear.		
3		Blow out the drill hole two times, using oil-free compressed air ( $p > 6$ bar)		
4		Brush the drill hole two times using a power drill. Corresponding brushes see <b>Table B9</b>		
5		Blow out the drill hole two times, using oil-free compressed air ( $p > 6$ bar)		





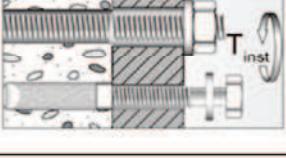
fischer Superbond

Intended use  
Installation instructions part 3

Annex B 11

### Installation instructions part 4

#### Installation fischer anchor rods RGM or fischer internal threaded anchors RG MI with capsule RSB

6		Resin capsule RSB or two RSB mini, must be pushed into the drill hole by hand.		Depending on the anchor being installed, use a suitable setting tool.
7			Only use clean and grease-free anchors. Using a suitable adapter, drive the RG M or fischer internal threaded anchor RG MI into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth.	
8		When reaching the correct embedment depth, excess mortar must emerge from the mouth of the drill hole. If not, the anchor must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated (7).		
9		Wait for the specified curing time, $t_{cure}$ see Table B10.		Mounting the fixture max $T_{inst}$ see Tables B2, B3.

fischer Superbond

Intended use  
Installation instructions part 4

Annex B 12

**Table C1:** Characteristic values of resistance for threaded rods under tension with mortar FIS SB or capsule RSB in hammer drilled hole

Size		M8	M10	M12	M16	M20	M24	M27 <sup>3)</sup>	M30
Installation safety factor	dry and wet concrete	$\gamma_2$	[-]	1,0					
	flooded hole <sup>2)</sup>			1,2	1,0				
<b>Combined pullout and concrete cone failure</b>									
Diameter of calculation	d [mm]	8	10	12	16	20	24	27	30
<b>Characteristic bond resistance in un-cracked concrete C20/25</b>									
Temperature range I <sup>1)</sup>	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	12	13	13	13	13	12	10	10
Temperature range II <sup>1)</sup>	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	12	12	12	13	13	12	10	10
Temperature range III <sup>1)</sup>	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	10	11	11	11	11	11	9	9
Temperature range IV <sup>1)</sup>	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	10	10	10	11	10	10	8	8
<b>Characteristic bond resistance in cracked concrete C20/25</b>									
Temperature range I <sup>1)</sup>	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	6,5	7,0	7,5	7,5	7,5	7,5	7,5	7,5
Temperature range II <sup>1)</sup>	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	6,0	6,5	7,5	7,5	7,5	7,5	7,0	7,0
Temperature range III <sup>1)</sup>	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	5,5	6,0	6,5	6,5	6,5	6,5	6,0	6,0
Temperature range IV <sup>1)</sup>	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	5,0	5,5	6,0	6,0	6,0	6,0	5,5	5,5
Increasing factor $\tau_{Rk}$	C25/30 [-]	1,02							
	C30/37 [-]	1,04							
	C35/45 [-]	1,07							
	C40/50 [-]	1,08							
	C45/55 [-]	1,09							
	C50/60 [-]	1,10							
<b>Splitting failure</b>									
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$ [mm]	1,0 $h_{ef}$							
	$2,0 > h/h_{ef} > 1,3$ [mm]	4,6 $h_{ef} - 1,8 h$							
	$h/h_{ef} \leq 1,3$ [mm]	2,26 $h_{ef}$							
Spacing	$s_{cr,sp}$ [mm]	2 $c_{cr,sp}$							

<sup>1)</sup> See Annex B 2

<sup>2)</sup> Only RSB

<sup>3)</sup> Only FIS SB

fischer Superbond

**Performances**

Design of bonded anchors  
Static or quasi-static action in tension

**Annex C 1**

**Table C2:** Characteristic values of resistance for threaded rods under tension with capsule RSB in diamond drilled hole

Size			M8	M10	M12	M16	M20	M24	M30
Installation safety factor	dry and wet concrete	$\gamma_2$	[ $\cdot$ ]	1,0					
	flooded hole		[ $\cdot$ ]	1,2	1,0				
<b>Combined pullout and concrete cone failure</b>									
Diameter of calculation	d	[mm]	8	10	12	16	20	24	30
<b>Characteristic bond resistance in un-cracked concrete C20/25</b>									
Temperature range I <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	13	13	14	14	14	13	11
Temperature range II <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	12	13	13	14	13	13	10
Temperature range III <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11	12	12	12	12	11	9,5
Temperature range IV <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	10	11	11	11	11	10	8,5
<b>Characteristic bond resistance in cracked concrete C20/25</b>									
Temperature range I <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	---	---	7,5	7,5	7,5	7,5
Temperature range II <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	---	---	7,5	7,5	7,5	7,0
Temperature range III <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	---	---	6,5	6,5	6,5	6,5
Temperature range IV <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	---	---	6,0	6,0	6,0	6,0
Increasing factor $\Psi_c$	C25/30	[ $\cdot$ ]	1,02						
	C30/37	[ $\cdot$ ]	1,04						
	C35/45	[ $\cdot$ ]	1,07						
	C40/50	[ $\cdot$ ]	1,08						
	C45/55	[ $\cdot$ ]	1,09						
	C50/60	[ $\cdot$ ]	1,10						
<b>Splitting failure</b>									
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]	1,0 $h_{ef}$						
	$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 $h_{ef} - 1,8 \cdot h$						
	$h/h_{ef} \leq 1,3$	[mm]	2,26 $h_{ef}$						
Spacing	$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$						

<sup>1)</sup> See Annex B 2

fischer Superbond

**Performances**

Design of bonded anchors

Static or quasi-static action in tension

**Annex C 2**

**Table C3:** Characteristic values of resistance for fischer internal threaded anchors RG MI under tension load with mortar FIS SB or capsule RSB in hammer drilled hole

Size		M8	M10	M12	M16	M20
Installation safety factor	dry and wet concrete	$\gamma_2$	[-]	1,0		
	flooded hole <sup>2)</sup>		[-]	1,2	1,0	
<b>Steel failure</b>						
Characteristic resistance with screw N <sub>Rk,s</sub>	Property class	5,8	[kN]	19	29	43
	Property class	8,8	[kN]	29	47	68
	Property class 70	A4	[kN]	26	41	59
	C	[kN]	26	41	59	110
<b>Combined pullout and concrete cone failure</b>						
Diameter of calculation	d <sub>H</sub>	[mm]	12	16	18	22
<b>Characteristic bond resistance in un-cracked concrete C20/25</b>						
Temperature range I <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	12	12	11	11
Temperature range II <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	12	11	11	10
Temperature range III <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11	10	10	9
Temperature range IV <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	10	9,5	9	8,5
<b>Characteristic bond resistance in cracked concrete C20/25</b>						
Temperature range I <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	5			
Temperature range II <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	5			
Temperature range III <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,5			
Temperature range IV <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4			
Increasing factor $\tau_{Rk}$ $\Psi_c$	C25/30	[-]	1,02			
	C30/37	[-]	1,04			
	C35/45	[-]	1,07			
	C40/50	[-]	1,08			
	C45/55	[-]	1,09			
	C50/60	[-]	1,10			
<b>Splitting failure</b>						
Edge distance c <sub>cr,sp</sub>	$h/h_{ef} \geq 2,0$	[mm]	1,0 h <sub>ef</sub>			
	$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 h <sub>ef</sub> – 1,8 h			
	$h/h_{ef} \leq 1,3$	[mm]	2,26 h <sub>ef</sub>			
Spacing	s <sub>cr,sp</sub>	[mm]	2 c <sub>cr,sp</sub>			

<sup>1)</sup> See Annex B 2

<sup>2)</sup> Only RSB

fischer Superbond

**Performances**

Design of bonded anchors

Static or quasi-static action in tension

**Annex C 3**

**Table C4:** Characteristic values of resistance for fischer internal threaded anchors RG MI under tension load with capsule RSB in diamond drilled hole

Size		M8	M10	M12	M16	M20			
Installation safety factor	dry and wet concrete	$\gamma_2$	[-]	1,0					
	flooded hole		[-]	1,2	1,0				
<b>Steel failure</b>									
Characteristic resistance with screw $N_{Rk,s}$	Property class	5.8	[kN]	19	29	43			
	Property class	8.8	[kN]	29	47	68			
	Property class 70	A4	[kN]	26	41	59			
		C	[kN]	26	41	59			
<b>Combined pullout and concrete cone failure</b>									
Diameter of calculation	$d_H$	[mm]	12	16	18	22			
<b>Characteristic bond resistance in un-cracked concrete C20/25</b>									
Temperature range I <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	13	12	12	11			
Temperature range II <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	13	12	12	11			
Temperature range III <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11	11	10	9,5			
Temperature range IV <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	10	10	9,5	9			
<b>Characteristic bond resistance in cracked concrete C20/25</b>									
Temperature range I <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	5					
Temperature range II <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	5					
Temperature range III <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	4,5					
Temperature range IV <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	---	4					
Increasing factor $\tau_{Rk}$	$\Psi_c$	C25/30	[-]	1,02					
		C30/37	[-]	1,04					
		C35/45	[-]	1,07					
		C40/50	[-]	1,08					
		C45/55	[-]	1,09					
		C50/60	[-]	1,10					
<b>Splitting failure</b>									
Edge distance $c_{cr,sp}$	$h/h_e \geq 2,0$	[mm]	1,0 $h_{ef}$						
	$2,0 > h/h_e > 1,3$	[mm]	4,6 $h_{ef} - 1,8 h$						
	$h/h_e \leq 1,3$	[mm]	2,26 $h_{ef}$						
Spacing	$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$						

<sup>1)</sup> See Annex B 2

fischer Superbond

**Performances**Design of bonded anchors  
Static or quasi-static action in tension**Annex C 4**

**Table C5:** Characteristic values of resistance for threaded rods under shear loads

Size	M8	M10	M12	M16	M20	M24	M27	M30
Factor k in equation (5.7) of TR 029 for the design of Bonded Anchors	k [-]							2,0

**Table C6:** Characteristic values of resistance for fischer internal threaded anchors RG MI under shear load

Size		M8	M10	M12	M16	M20
Installation safety factor	$\gamma_2$ [-]					1,0
<b>Steel failure without lever arm</b>						
Characteristic resistance $V_{Rk,s}$	Property class	5.8 [kN]	9,2	14,5	21,1	39,2
	8.8 [kN]	14,6	23,2	33,7	62,7	90,0
Characteristic resistance $M^0_{Rk,s}$	Property class 70	A4 [kN]	12,8	20,3	29,5	54,8
	C [kN]	12,8	20,3	29,5	54,8	86,0
<b>Steel failure with lever arm</b>						
Characteristic resistance $M^0_{Rk,s}$	Property class	5.8 [Nm]	20	39	68	173
	8.8 [Nm]	30	60	105	266	519
Concrete prout failure	Property class 70	A4 [Nm]	26	52	92	232
Factor k in equation (5.7) of TR 029 for the design of Bonded Anchors	k [-]					2,0

fischer Superbond

**Performances**Design of bonded anchors  
Static or quasi-static action under shear loads**Annex C 5**

**Table C7:** Characteristic values of resistance for reinforcing bars under tension loads with mortar FIS SB in hammer drilled hole

Size	$\emptyset$	[mm]	8	10	12	14	16	20	25	28	32
Installation safety factor	$\gamma_2$	[-]						1,0			
<b>Combined pullout and concrete cone failure</b>											
Diameter of calculation	d	[mm]	8	10	12	14	16	20	25	28	32
<b>Characteristic bond resistance in un-cracked concrete C20/25</b>											
Temperature range I <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	8,0	8,5	9,0	9,5	9,5	10	9,5	9,0	7,5
Temperature range II <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	8,0	8,5	9,0	9,0	9,5	9,5	9,0	8,5	7,5
Temperature range III <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	7,0	7,5	8,0	8,0	8,5	8,5	8,0	7,5	6,5
Temperature range IV <sup>1)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	6,5	7,0	7,0	7,5	7,5	8,0	7,5	7,0	6,0
<b>Characteristic bond resistance in cracked concrete C20/25</b>											
Temperature range I <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,5	6,0	6,0	6,0	7,0	6,0	6,0	6,0	6,0
Temperature range II <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,5	5,5	5,5	5,5	6,5	6,0	6,0	6,0	6,0
Temperature range III <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,0	5,0	5,0	5,0	6,0	5,5	5,5	5,5	5,5
Temperature range IV <sup>1)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	3,5	4,5	4,5	4,5	5,5	5,0	5,0	5,0	5,0
Increasing factor $\tau_{Rk}$	C25/30	[-]							1,02		
	C30/37	[-]							1,04		
	C35/45	[-]							1,07		
	C40/50	[-]							1,08		
	C45/55	[-]							1,09		
	C50/60	[-]							1,10		
<b>Splitting failure</b>											
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]							1,0 $h_{ef}$		
	$2,0 > h/h_{ef} > 1,3$	[mm]							4,6 $h_{ef} - 1,8 h$		
	$h/h_{ef} \leq 1,3$	[mm]							2,26 $h_{ef}$		
Spacing	$s_{cr,sp}$	[mm]							2 $c_{cr,sp}$		

<sup>1)</sup> See Annex B 2

fischer Superbond

**Performances**Design of bonded anchors  
Static or quasi-static action in tension**Annex C 6**

**Table C8:** Characteristic values of resistance for fischer rebar anchors FRA under tension loads with mortar FIS SB in hammer drilled hole

Size			M12	M16	M20	M24
Installation safety factor	$\gamma_2$	[ - ]			1,0	
<b>Steel failure</b>						
Characteristic resistance	$N_{Rk,s}$	[kN]	63	111	173	270
Partial safety factor	$\gamma_{Ms,N}$ <sup>1)</sup>	[ - ]			1,4	
<b>Combined pullout and concrete cone failure</b>						
Diameter of calculation	d	[mm]	12	16	20	25
<b>Characteristic bond resistance in un-cracked concrete C20/25</b>						
Temperature range I <sup>2)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	9,0	9,5	10	9,5
Temperature range II <sup>2)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	9,0	9,5	9,5	9,0
Temperature range III <sup>2)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	8,0	8,5	8,5	8,0
Temperature range IV <sup>2)</sup>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	7,0	7,5	8,0	7,5
<b>Characteristic bond resistance in cracked concrete C20/25</b>						
Temperature range I <sup>2)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	6,0	7,0	6,0	6,0
Temperature range II <sup>2)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	5,5	6,5	6,0	6,0
Temperature range III <sup>2)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	5,0	6,0	5,5	5,5
Temperature range IV <sup>2)</sup>	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,5	5,5	5,0	5,0
Increasing factor $\tau_{Rk}$	C25/30	[ - ]	1,02			
	C30/37	[ - ]	1,04			
	C35/45	[ - ]	1,07			
	C40/50	[ - ]	1,19			
	C45/55	[ - ]	1,08			
	C50/60	[ - ]	1,10			
<b>Splitting failure</b>						
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]	1,0 $h_{ef}$			
	$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 $h_{ef} - 1,8 \text{ h}$			
	$h/h_{ef} \leq 1,3$	[mm]	2,26 $h_{ef}$			
Spacing	$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$			

<sup>1)</sup> In absence of other national regulations<sup>2)</sup> See Annex B 2

fischer Superbond

**Performances**Design of bonded anchors  
Static or quasi-static action in tension**Annex C 7**

**Table C9:** Characteristic values of resistance for reinforcing bars under shear loads with mortar FIS SB

Size	$\emptyset$	[mm]	8	10	12	14	16	20	25	28	32
<b>Concrete prayout failure</b>											
Factor k in equation (5.7) of Technical Report TR 029, Section 5.2.3.3	k	[-]							2,0		

**Table C10:** Characteristic values of resistance for fischer rebar anchors FRA under shear load with mortar FIS SB

Size	M12	M16	M20	M24
<b>Steel failure without lever arm</b>				
Characteristic resistance $V_{Rk,s}$	[kN]	30	55	86
Partial safety factor $\gamma_{Ms,V}^{1)}$	[-]		1,56	
<b>Steel failure with lever arm</b>				
Characteristic resistance $M^0_{Rk,s}$	[Nm]	92	233	454
Partial safety factor $\gamma_{Ms,V}^{1)}$	[-]		1,56	
<b>Concrete prayout failure</b>				
Factor k in equation (5.7) of TR 029 for the design of Bonded Anchors	k	[-]		2,0

fischer Superbond

**Performances**  
 Design of bonded anchors  
 Static or quasi-static action under shear loads

**Annex C 8**

**Table C11:** Displacements under tension load for threaded rods<sup>1)</sup>

Size	M8	M10	M12	M16	M20	M24	M27	M30
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>								
Displacement $\delta_{N0}$ [mm/(N/mm <sup>2</sup> )]	0,07	0,08	0,09	0,10	0,11	0,12	0,13	0,13
Displacement $\delta_{N\infty}$ [mm/(N/mm <sup>2</sup> )]	0,13	0,14	0,15	0,17	0,17	0,18	0,19	0,19

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{N0} \cdot \tau_{sd} / 1,4$

Displacement for long term load =  $\delta_{N\infty} \cdot \tau_{sd} / 1,4$

(  $\tau_{sd}$  : design bond strength )**Table C12:** Displacements under shear load for threaded rods<sup>1)</sup>

Size	M8	M10	M12	M16	M20	M24	M27	M30
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>								
Displacement $\delta_{V0}$ [mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06	0,05	0,05
Displacement $\delta_{V\infty}$ [mm/kN]	0,27	0,22	0,18	0,14	0,11	0,09	0,08	0,07

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{V0} \cdot V_d / 1,4$

Displacement for long term load =  $\delta_{V\infty} \cdot V_d / 1,4$

(  $V_d$  : design shear resistance )**Table C13:** Displacements under tension load for fischer internal threaded anchors RG MI<sup>1)</sup>

Size	M8	M10	M12	M16	M20
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>					
Displacement $\delta_{N0}$ [mm/(N/mm <sup>2</sup> )]	0,09	0,10	0,10	0,11	0,19
Displacement $\delta_{N\infty}$ [mm/(N/mm <sup>2</sup> )]	0,13	0,15	0,15	0,17	0,19

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{N0} \cdot \tau_{sd} / 1,4$

Displacement for long term load =  $\delta_{N\infty} \cdot \tau_{sd} / 1,4$

(  $\tau_{sd}$  : design bond strength )**Table C14:** Displacements under shear load for fischer internal threaded anchors RG MI<sup>1)</sup>

Size	M8	M10	M12	M16	M20
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>					
Displacement $\delta_{V0}$ [mm/kN]	0,12	0,09	0,08	0,07	0,05
Displacement $\delta_{V\infty}$ [mm/kN]	0,18	0,14	0,12	0,10	0,08

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{V0} \cdot V_d / 1,4$

Displacement for long term load =  $\delta_{V\infty} \cdot V_d / 1,4$

(  $V_d$  : design shear resistance )

fischer Superbond

Performances  
Displacements threaded rods and fischer internal threaded anchor RG MI**Annex C 9**

**Table C15:** Displacements under tension load for reinforcing bars<sup>1)</sup>

Size	$\emptyset$	8	10	12	14	16	20	25	28	32
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>										
Displacement	$\delta_{N0}$	[mm/(N/mm <sup>2</sup> )]	0,07	0,08	0,09	0,09	0,10	0,11	0,12	0,13
Displacement	$\delta_{N\infty}$	[mm/(N/mm <sup>2</sup> )]	0,12	0,13	0,13	0,15	0,16	0,16	0,18	0,20

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{N0} \cdot \tau_{sd} / 1,4$

Displacement for long term load =  $\delta_{N\infty} \cdot \tau_{sd} / 1,4$

(τ<sub>sd</sub> : design bond strength)**Table C16:** Displacements under shear load for reinforcing bars<sup>1)</sup>

Size	$\emptyset$	8	10	12	14	16	20	25	28	32
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>										
Displacement	$\delta_{V0}$	[mm/kN]	0,18	0,15	0,12	0,10	0,09	0,07	0,06	0,05
Displacement	$\delta_{V\infty}$	[mm/kN]	0,27	0,22	0,18	0,16	0,14	0,11	0,09	0,08

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{V0} \cdot V_d / 1,4$

Displacement for long term load =  $\delta_{V\infty} \cdot V_d / 1,4$

(V<sub>d</sub> : design shear resistance)**Table C17:** Displacements under tension load for fischer rebar anchors FRA<sup>1)</sup>

Size		M12	M16	M20	M24
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>					
Displacement	$\delta_{N0}$	[mm/(N/mm <sup>2</sup> )]	0,09	0,10	0,11
Displacement	$\delta_{N\infty}$	[mm/(N/mm <sup>2</sup> )]	0,13	0,16	0,18

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{N0} \cdot \tau_{sd} / 1,4$

Displacement for long term load =  $\delta_{N\infty} \cdot \tau_{sd} / 1,4$

(τ<sub>sd</sub> : design bond strength)**Table C18:** Displacements under shear load for fischer rebar anchors FRA<sup>1)</sup>

Size		M12	M16	M20	M24
<b>Un-cracked and cracked concrete; temperature range I, II, III, IV</b>					
Displacement	$\delta_{V0}$	[mm/kN]	0,12	0,09	0,07
Displacement	$\delta_{V\infty}$	[mm/kN]	0,18	0,14	0,09

<sup>1)</sup> Calculation of the displacement for design load

Displacement for short term load =  $\delta_{V0} \cdot V_d / 1,4$

Displacement for long term load =  $\delta_{V\infty} \cdot V_d / 1,4$

(V<sub>d</sub> : design shear resistance)

fischer Superbond	<b>Annex C 10</b>
Performances Displacements reinforcing bars and fischer rebar anchor FRA	

**Table C19A:** Characteristic values of resistance for fischer threaded rods FIS A and RGM under seismic action performance category C1 with FIS SB or capsule RSB in hammer drilled hole

Size		M8	M10	M12	M16	M20	M24	M27 <sup>5)</sup>	M30
<b>Characteristic resistance tension load, steel failure</b>									
$N_{Rk,s,C1}$ [kN]	Zinc plated steel	Property class	5,8	19	29	43	79	123	177
			8,8	30	47	68	126	196	282
$\gamma_{M,s,C1}$ <sup>1)</sup> [-]	Stainless steel A4 and steel C	Property class	50	19	29	43	79	123	177
			70	26	41	59	110	172	247
$\gamma_{M,s,C1}$ <sup>1)</sup> [-]	Zinc plated steel	Property class	80	30	47	68	126	196	282
									368
$\gamma_{M,s,C1}$ <sup>1)</sup> [-]	Stainless steel A4 and steel C	Property class	50				1,50		
			70				2,86		
$\gamma_{M,s,C1}$ <sup>1)</sup> [-]	Stainless steel A4 and steel C	Property class	80				1,50 <sup>2)</sup> / 1,87		
							1,6		
<b>Characteristic bond resistance, combined pullout and concrete cone failure</b>									
Temperature range I <sup>3)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	4,6	5,0	5,6	5,6	5,6	5,6	5,6
Temperature range II <sup>3)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	4,3	4,6	5,6	5,6	5,6	5,6	5,3
Temperature range III <sup>3)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	3,9	4,3	4,9	4,9	4,9	4,9	4,5
Temperature range IV <sup>3)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	3,6	3,9	4,5	4,5	4,5	4,5	4,1
<b>Characteristic resistance shear load, steel failure without lever arm</b>									
$V_{Rk,s,C1}$ <sup>1)</sup> [kN]	Zinc plated steel	Property class	5,8	9	15	21	39	61	89
			8,8	15	23	34	63	98	141
$V_{Rk,s,C1}$ <sup>1)</sup> [kN]	Stainless steel A4 and steel C	Property class	50	9	15	21	39	61	89
			70	13	20	30	55	86	124
$V_{Rk,s,C1}$ <sup>1)</sup> [kN]	Stainless steel A4 and steel C	Property class	80	15	23	34	63	98	141
									184
$V_{Rk,s,C1}$ <sup>1)</sup> [kN]	Stainless steel A4 and steel C	Property class							225

<sup>1)</sup> For fischer treaded rods FIS A / RGM the factor for steel ductility is 1,0

<sup>2)</sup>  $f_{uk} = 700 \text{ N/mm}^2$ ;  $f_{yk} = 560 \text{ N/mm}^2$

<sup>3)</sup> See Annex B 2

<sup>4)</sup> Only RSB

<sup>5)</sup> Only FIS SB

fischer Superbond

**Performances**

Design of bonded anchors  
Seismic performances category C1

**Annex C 11**

**Table C19B:** Characteristic values of resistance for standard threaded rods under seismic action performance category C1 with mortar FIS SB or capsule RSB in hammer drilled hole

Size	M8	M10	M12	M16	M20	M24	M27 <sup>2)</sup>	M30			
<b>Characteristic resistance tension load, steel failure</b>											
Steel failure	See Table C19A										
Characteristic bond resistance, combined pullout and concrete cone failure	See Table C19A										
<b>Characteristic resistance shear load, steel failure without lever arm</b>											
$V_{Rk,s,C1}$ [kN]	Zinc plated steel	Property class	5.8	6	11	15	27	43	62	81	99
			8.8	11	16	24	44	69	99	129	158
$V_{Rk,s,C1}$ [kN]	Stainless steel A4 and steel C	Property class	50	6	11	15	27	43	62	81	99
			70	9	14	21	39	60	87	113	138
			80	11	16	24	44	69	99	129	158

**Table C20:** Characteristic values of resistance for reinforcing rebars under seismic action performance category C1 with mortar FIS SB in hammer drilled hole

Size	$\emptyset$	8	10	12	14	16	20	25	28	32
<b>Characteristic resistance tension load, steel failure</b>										
$N_{Rk,s,C1}$	[kN]	28	44	63	85	111	173	270	339	443
<b>Characteristic bond resistance, combined pullout and concrete cone failure (dry and wet concrete)</b>										
Temperature range I <sup>1)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	3,2	4,3	4,5	4,5	5,3	4,5	4,5	4,5
Temperature range II <sup>1)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	3,2	3,9	4,1	4,1	4,9	4,5	4,5	4,5
Temperature range III <sup>1)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	2,8	3,6	3,8	3,8	4,5	4,1	4,1	4,1
Temperature range IV <sup>1)</sup>	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	2,5	3,2	3,4	3,4	4,1	3,8	3,8	4,3
<b>Characteristic resistance shear load, steel failure without lever arm</b>										
$V_{Rk,s,C1}$	[kN]	10	12	22	30	39	61	95	119	155

<sup>1)</sup> See Annex B 2

<sup>2)</sup> Only FIS SB

fischer Superbond

#### Performances

Design of bonded anchors

Seismic performances category C1

**Annex C 12**

**Table C21:** Characteristic values of resistance for fischer threaded rods FIS A, RGM and standard threaded rods under seismic action performance category C2 with FIS SB in hammer drilled hole

Size		M8	M10	M12	M16	M20	M24	M27	M30	
<b>Characteristic resistance tension load, steel failure</b>										
N <sub>Rk,s,C2</sub> [kN]	Zinc plated steel	Property class	5,8 8,8	-- --	-- 61	39 116	72 173	108 282	177 --	
	Stainless steel A4 and steel C	Property class	50 70 80	-- -- --	-- 53	39 101	72 152	108 247	177 --	
					61	116	173	282	--	
									--	
<b>Characteristic bond resistance, combined pullout and concrete cone failure</b>										
Temperature range I <sup>1)</sup>		τ <sub>Rk,C2</sub> [N/mm <sup>2</sup> ]	--	--	4,5	3,2	2,6	3,0	--	
Temperature range II <sup>1)</sup>		τ <sub>Rk,C2</sub> [N/mm <sup>2</sup> ]	--	--	4,5	3,2	2,6	3,0	--	
Temperature range III <sup>1)</sup>		τ <sub>Rk,C2</sub> [N/mm <sup>2</sup> ]	--	--	3,9	2,7	2,3	2,6	--	
Temperature range IV <sup>1)</sup>		τ <sub>Rk,C2</sub> [N/mm <sup>2</sup> ]	--	--	3,6	2,5	2,1	2,4	--	
δ <sub>N,(DLS)</sub> <sup>3)</sup>		[mm/(N/mm <sup>2</sup> )]	--	--	0,09	0,10	0,11	0,12	--	
δ <sub>N,(ULS)</sub> <sup>3)</sup>		[mm/(N/mm <sup>2</sup> )]	--	--	0,15	0,17	0,17	0,18	--	
<b>Characteristic resistance shear load, steel failure without lever arm</b>										
V <sub>Rk,s,C2</sub> <sup>2)</sup> [kN]	Zinc plated steel	Property class	5,8 8,8	- -	- 22,4	13,9 44,1	27,3 68,6	42,7 98,7	62,3 --	
	Stainless steel A4 and steel C	Property class	50 70 80	- - -	- 13,9 19,8	13,9 38,5	27,3 60,2	42,7 86,8	62,3 --	
					22,4	44,1	68,6	98,7	--	
									--	
δ <sub>V,(DLS)</sub> <sup>4)</sup>		[mm/(N/mm <sup>2</sup> )]	-	-	0,18	0,10	0,07	0,06	-	
δ <sub>V,(ULS)</sub> <sup>4)</sup>		[mm/(N/mm <sup>2</sup> )]	-	-	0,25	0,14	0,11	0,09	-	

<sup>1)</sup> See Annex B 2

<sup>2)</sup> For fischer threaded rods FIS A / RGM the factor for steel ductility is 1,0

<sup>3)</sup> Calculation for displacement

$$\delta_{N0} = \delta_{N0-Faktor} \cdot \tau;$$

$$\delta_{N\infty} = \delta_{N\infty-Faktor} \cdot \tau;$$

<sup>4)</sup> Calculation for displacement

$$\delta_{V0} = \delta_{V0-Faktor} \cdot V;$$

$$\delta_{V\infty} = \delta_{V\infty-Faktor} \cdot V_i;$$

fischer Superbond

**Performances**

Design of bonded anchors

Seismic performances category C2

**Annex C 13**