

# X 810


## ballistic goggle

Compatible with all types of helmets thanks to its low profile shape and its **quick-release system**, the X810 offers an array of innovations. Compact, panoramic and modular, in waterproof or ventilated version, the X810 offers protection for the most extreme situations. In its ventilated version, the X810 goggle provides the best resistance to fogging with its **PLATINUM** coating.




### PLATINUM

The new PLATINUM® coating guarantees even more safety, reliability and comfort. Washable (water and soap), this permanent coating applied on both sides of the lens makes it highly scratch resistant and durably delays the appearance of fogging.

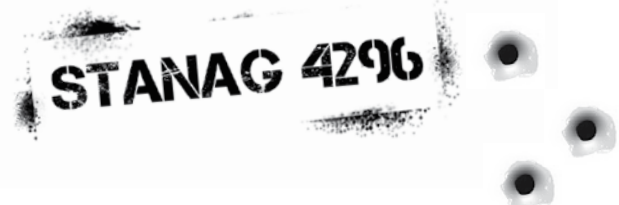

Spare lenses:

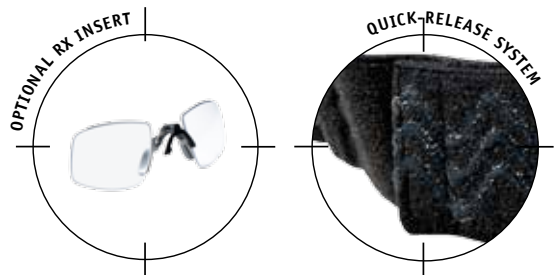

**X810 TAN VERSION**  
supplied with a soft tan case



**X810 BLACK VERSION**  
supplied with a soft black case



Supplied with microfibre pouch around the strap and soft carry case (tan or black according to the version).

# X 810

## ballistic goggle

### markings / norms

Model	Reference	Version	Lens markings	Frame marking	V50 Ballistic Resistance STANAG 4296	ANSI/MIL	Coatings
<b>X810</b>	X810NPSI ■ black	Clear	2C-1.2 ☞ 1 BT KN CE	☞ EN166 3* 4* 5* BT CE	900 km/h - 250 m/s	MIL-PRF-32432 ANSIZ87.1-2010	PLATINUM
<b>X810</b>	X810SPSI ■ tan	Clear	2C-1.2 ☞ 1 BT KN CE	☞ EN166 3* 4* 5* BT CE	900 km/h - 250 m/s	MIL-PRF-32432 ANSIZ87.1-2010	PLATINUM
<b>X810</b> Spare lens	FAX810PSI	Clear	2C-1.2 ☞ 1 BT KN CE	-	900 km/h - 250 m/s	MIL-PRF-32432 ANSIZ87.1-2010	PLATINUM
	FAX810PSF	Smoke	5-3.1 ☞ 1 BT KN CE	-	929 km/h - 258 m/s	MIL-PRF-32432 ANSIZ87.1-2010	PLATINUM
	FAX810ESP	ESP	5-1.4 ☞ 1 BT CE	-	914 km/h - 254 m/s	MIL-PRF-32432 ANSIZ87.1-2010	ASAF
	FAX810CSP	CSP	5-1.4 ☞ 1 BT KN CE	-	929 km/h - 258 m/s	ANSIZ87.1-2010	PLATINUM
<b>X810</b> Optical insert kit	TACTICALRXXIT	-	-	-	-	-	-
<b>X810</b> Fixture	COMBFIXS	Elastic fixture + tan scratch ■					
	COMBFIXN	Elastic fixture + black scratch ■					

\*With upper and lower protection

#### CHARACTERISTICS

**STRAP:** Wide adjustable 35 mm strap  
Quick-release system  
**WEIGHT:** 120 g

#### CHARACTERISTICS

**LENS:** Ballistic PC - 3 mm - curve 9  
PLATINUM® coating (except ESP version)  
Optional optical insert + adapter  
Interchangeable lenses

**FRAME:**  
Modular frame in waterproof or ultra-ventilated  
versions (upper and lower protection)  
Versions available in tan and black

## HIGH RESISTANCE



### packaging and ean13 code :

Model	Reference	Unit	Inner box	Units	Outer box	Units
<b>X810</b>	X810NPSI ■ black	3660740006808	X	X	3660740206802	x 60
	X810SPSI ■ tan	3660740006815	X	X	3660740206826	X 60
	FAX810PSI	3660740006839	3660740106836	x 15	3660740206833	x 180
	FAX810PSF	3660740006846	3660740106843	x 15	3660740206840	x 180
	FAX810ESP	3660740006853	3660740106850	x 15	3660740206857	x 180
	FAX810CSP	3660740007997	3660740107994	x 15	3660740207991	x 180
	TACTICALRXXIT	3660740008031	3660740108038	x 25	3660740208035	X 300
	COMBFIXS	3660740007270	3660740107277	TBC	3660740207274	X 400
	COMBFIXN	3660740007409	3660740107406	TBC	3660740207403	X 400

#### Notified laboratories for certification: